


不锈钢弹簧钩


- 适用于安全绳索的快速连接.
- 材质 : 304 , 304L , 316 , 316L, 304 无磁

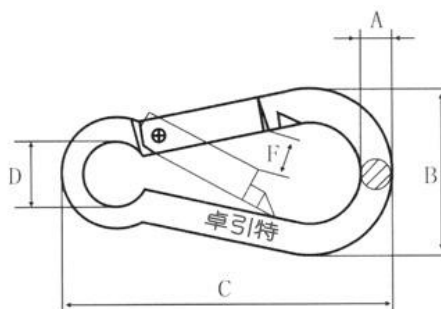

规格型号	尺寸 mm					额载	自重
	A	B	C	D	F	Kg	Kg
SGM65-4*40	3.93	19.7	40.7	6.1	5	36	0.008
SGM65-5*50	4.9	25.18	50.2	8.1	7	45	0.014
SGM65-6*60	5.8	28.9	60.5	9.4	7.8	63	0.026
SGM65-7*70	6.84	34.7	70	11.2	8	91	0.043
SGM65-8*80	7.82	40.3	80.3	12	11	113	0.064
SGM65-9*90	8.84	44.5	89.45	13	12	127	0.093
SGM65-10*100	9.74	49.5	100.8	16	12	181	0.13
SGM65-11*120	10.81	58	120.8	18	14	227	0.19
SGM65-12*140	11.73	68.5	140.5	20.3	23	272	0.26
SGM65-14*180	13.66	88.5	180	26.1	32.6	318	0.44

带孔弹簧钩


- 适用于安全绳索的快速连接.
- 材质 : 304 , 304L , 316 , 316L, 304 无磁

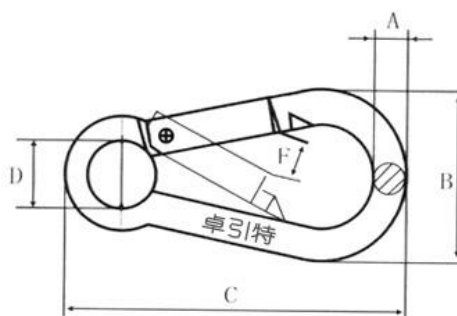

规格型号	尺寸 mm					额载	自重
	A	B	C	D	F	Kg	Kg
SGM63-4*40	3.93	19.7	40.7	6.1	5	36	0.008
SGM63-5*50	4.9	25.18	50.2	8.1	7	45	0.014
SGM63-6*60	5.8	28.9	60.5	9.4	7.8	63	0.026
SGM63-7*70	6.84	34.7	70	11.2	8	91	0.043
SGM63-8*80	7.82	40.3	80.3	12	11	113	0.064
SGM63-9*90	8.84	44.5	89.45	13	12	127	0.093
SGM63-10*100	9.74	49.5	100.8	16	12	181	0.13
SGM63-11*120	10.81	58	120.8	18	14	227	0.19
SGM63-12*140	11.73	68.5	140.5	20.3	23	272	0.26

带螺母弹簧钩


- 适用于安全绳索的快速连接.
- 材质 : 304 , 304L , 316 , 316L, 304 无磁

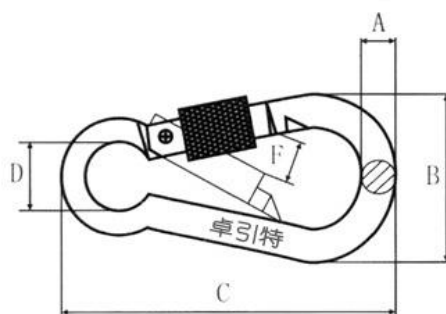

规格型号	尺寸 mm					额载	自重
	A	B	C	D	F	Kg	Kg
SGM66-5*50	4.9	25.18	50.2	8.1	7	45	0.014
SGM66-6*60	5.8	28.9	60.5	9.4	7.8	63	0.026
SGM66-7*70	6.84	34.7	70	11.2	8	91	0.043
SGM66-8*80	7.82	40.3	80.3	12	11	113	0.064
SGM66-9*90	8.84	44.5	89.45	13	12	127	0.093
SGM66-10*100	9.74	49.5	100.8	16	12	181	0.13
SGM66-11*120	10.81	58	120.8	18	14	227	0.19
SGM66-12*140	11.73	68.5	140.5	20.3	23	272	0.26

简易弹簧钩


- 适用于安全绳索的快速连接.
- 材质 : 304 , 304L , 316 , 316L, 304 无磁

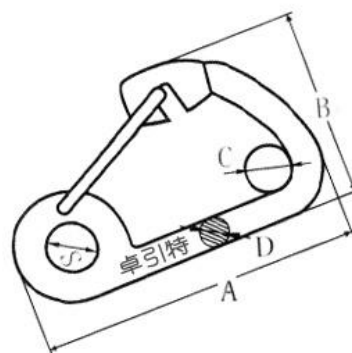

规格型号	尺寸 mm					额载	自重
	A	B	C	D	S	Kg	Kg
SGM64-6*60	58.7	33.9	13	5.8	8.9	60	0.028
SGM64-8*80	80.6	43.6	18	7.8	11.6	113	0.064
SGM64-10*100	99.4	54.2	19	9.8	14	163	0.13
SGM64-12*140	120.2	71.2	26.2	11.7	17	250	0.23

快速连接环

- 适用于安全绳索的快速连接.
- 材质 : 304 , 304L , 316 , 316L, 304 无磁

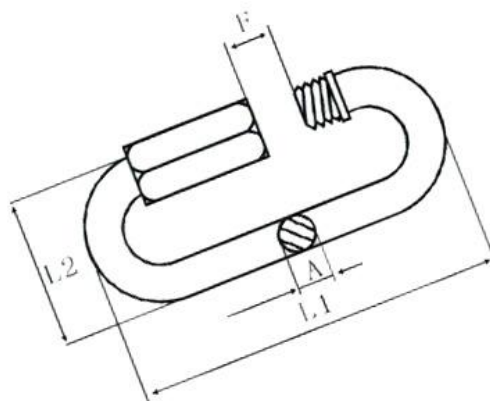

规格型号	尺寸 mm				额载	自重
	A	L1	L2	F	Kg	Kg
SGM67-M3.5	3.5	37	17.7	5	79	0.009
SGM67-M4	4	40.8	19.5	6.5	227	0.012
SGM67-M5	5	49.6	23.7	6.5	294	0.021
SGM67-M6	6	57.5	27.4	7.5	396	0.034
SGM67-M8	7.8	75.4	34.2	11	691	0.079
SGM67-M10	9.8	89.5	42.1	13	1042	0.135
SGM67-M12	11.6	106	48.7	14	1133	0.211
SGM67-M14	13.6	121.8	57.2	15.7	1280	0.35