


Eye Hoist Hook

- Available in carbon steel and alloy steel.
- Forged-Quenched and tempered.
- Individually proof test at 2.5 times working load limit.
- Fatigue tested for 20000 cycles.
- Breakage test.
- 100% magnaflux crack detection.
- Safety factor 5:1
- Surface finish: Powder plastified.

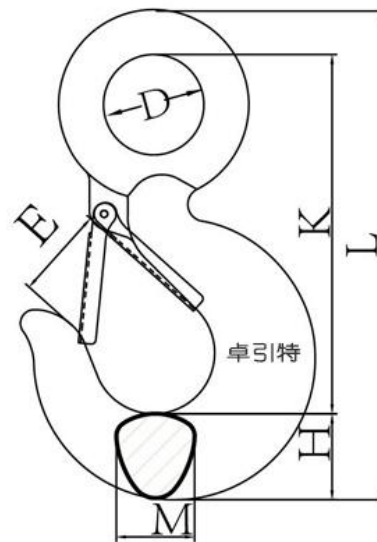

ITEM NO.	WLL	Breaking Strength	Size (mm)						Weight
	T		T	D±0.6	E±2	H±1.5	K±2.5	M±5	
8-130-0.75	0.75	3.75	16.5	19	17	72	16	97	0.21
8-130-1	1	5	19	22	19	82	16	110	0.28
8-130-1.5	1.5	7.5	23	23	21	93.5	17.5	125	0.4
8-130-2	2	10	28	24	26	103	21	140.5	0.65
8-130-3	3	15	31	27.5	28	119	23	162	0.81
8-130-5	5	25	39	33	37	146	30	201	1.75
8-130-7	7	35	51	40	46.5	186.5	38	256	3.77
8-130-11	11	55	62	51	57	231.5	46	317	6.8
8-130-15	15	75	73	57	70	260	55	360	9.96
8-130-22	22	110	89	75	76	318	68.5	434	15.33
8-130-30	30	150	90	82	91	360	70	495.5	27.2