


G80 Eye Sling Hook

- Forged super alloy steel-Quenched and tempered
- Individually proof test at 2.5 times working load limit.
- Fatiuge tested for 20000 cycles.
- Breakage test
- 100% magnaflux crack detection.
- With cast latch
- Suitable for EN818-2 G80 chain.
- Safety factor 4:1
- Surface finish: Powder plastified.

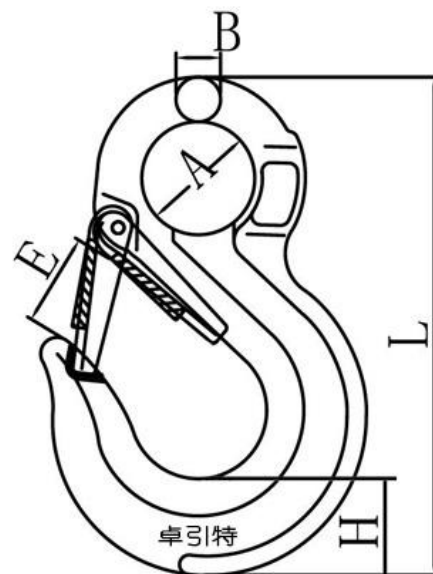


ITEM NO.	WLL	Breaking Strength	Size(mm)					Weight
	T		T	B±1	E±1	A±1	L±1	
8-013-06	1.12	4.48	9	24	20	108	21	0.3
8-013-7/8	2	8	11	30	25	133	27.5	0.4
8-013-10	3.15	12.6	15	34	38	167	33	0.9
8-013-13	5.3	21.2	19	39	43	213	43.5	1.7
8-013-16	8	32	23	46	50	255	50	3.2
8-013-20	12.5	50	24	48	56	305	56	5.8
8-013-22	15	60	32	71	62	348	62	8.5
8-013-26	21.2	84.8	35	81	74	394	75	13
8-013-32	31.5	126	37	102	88	480	89	17

G100 Eye Sling Hook

- Forged super alloy steel-Quenched and tempered.
- 25% stronger than G80.
- Individually proof test at 2.5 times working load limit.
- Fatiuge tested for 20000 cycles.

- Breakage test
- 100% magnaflux crack detection.
- With cast latch
- Suitable for G100 chain.
- Safety factor 4:1
- Surface finish: Powder plastified.

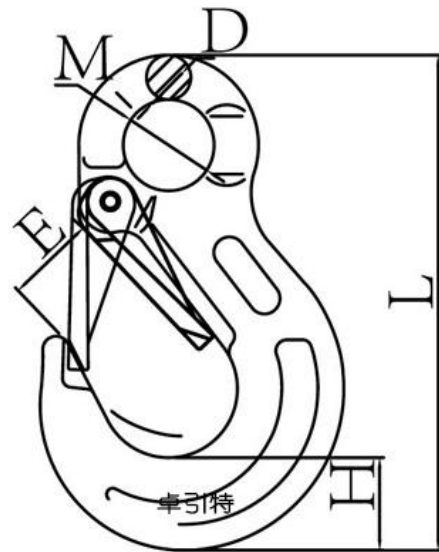

ITEM NO.	WLL	Breaking Strength	Size(mm)					Weight
	T		T	D±1	E±1	H±1	M±1	L±1
10-1003-06	1.4	5.6	10	18.5	21	20.5	111	0.32
10-1003-08	2.5	10	11	25	27.5	25	137.5	0.6
10-1003-10	4	16	16	28	33	34	171.5	1.2
10-1003-13	6.7	26.8	19	38	43.5	43	219	2.2
10-1003-16	10	40	24.5	44	50	50	260	3.5
10-1003-20	16	64	27	52	56	56	298	7.15
10-1003-22	19	76	29	66	62	62	330	11.5
10-1003-26	26.5	106	35	73	75	75	376	12.2
10-1003-32	39.3	157.2	39	87	89	89	458	17.5