


Anti cutting webbing sling

- According to JB/T8521.1.2007 and EN1492-1 : 2000+A1 : 2008.
- The lifting belt is coated with anti-cutting polyurethane, which can reduce the damage to the sling belt.
- Suitable temperature: polyester, polyamide -40°C~100°C , polypropylene-40°C~80°C.
- Safety factor 6:1 or 7:1

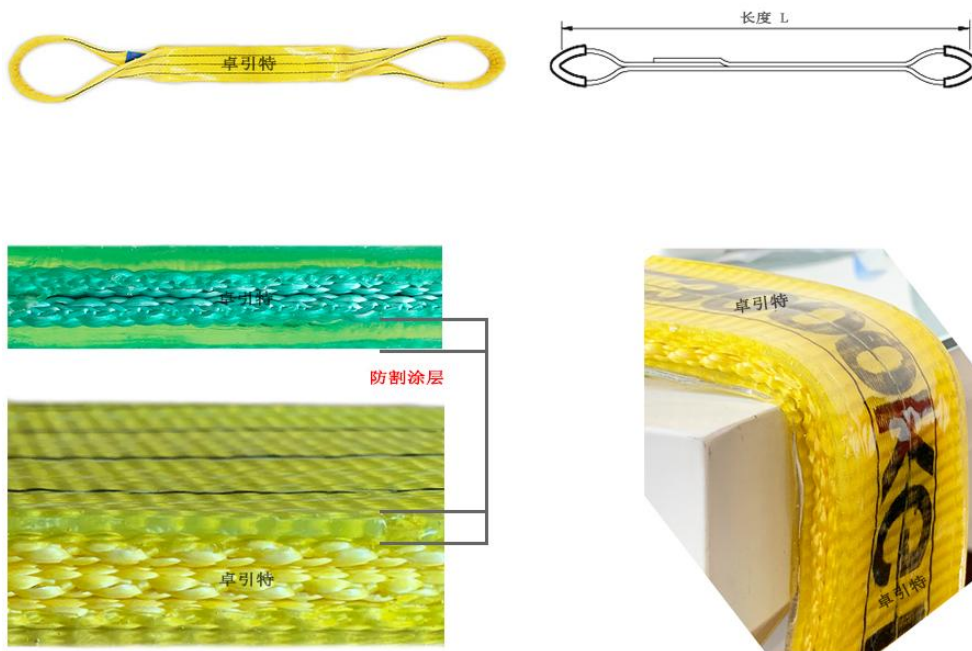

Model	Color	WLL (kg)	Thickn ess (mm)	Width 6:1 (mm)	Width 7:1 (mm)	Length (mm)	Eye length (mm)	Weight 6:1 (kg/m)	Weight 7:1 (kg/m)
WG01-01	Purple	1000	7.5	25	30	1.1~100	350	0.42	0.52
WG01-02	Green	2000	7.5	50	60	1.2~100	400	0.84	0.97
WG01-03	Yellow	3000	7.5	75	90	1.3~100	450	1.25	1.49
WG01-04	Grey	4000	7.5	100	120	1.4~100	500	1.62	2.06
WG01-05	Red	5000	7.5	125	150	2.0~100	550	2.11	2.51
WG01-06	Brown	6000	7.5	150	180	2.0~100	600	2.56	2.98
WG01-08	Blue	8000	7.5	200	240	2.0~100	700	3.43	3.98
WG01-10	Orange	10000	7.5	250	300	3.0~100	800	4.24	4.95
WG01-12	Orange	12000	7.5	300	300	3.0~100	900	4.98	5.59
WG01-16	Blue	16000	15	200	240	3.0~100	700	5.42	5.91
WG01-20	Orange	20000	15	250	300	3.0~100	800	6.9	7.57
WG01-24	Orange	24000	15	300	300	3.0~100	900	7.82	8.2
WG01-30	Orange	30000	20	300	300	3.5~100	1000	9.56	10.06

- The thickness of the anti-cutting coating is 4 mm by default, and can also be customized according to the required thickness