


## Casting Rigging

- The casting technology has no damage to the wire rope.
- Small extension,it is suitable for the environment with higher size.
- The hot casting of the pasteurized alloy and the cold casting of the resin are two forms.
- Its structure is divided into open, closed, open and closed combination.
- The casting rigging can be designed according to the requirements of the customer.
- The data in the table are b type wire rope, steel core and nominal tensile strength 1770MPa series wire rope.
- The joint can provide forgings and weldments and defaults to weldments when no special requirements are required.


## Opened Casting Rigging

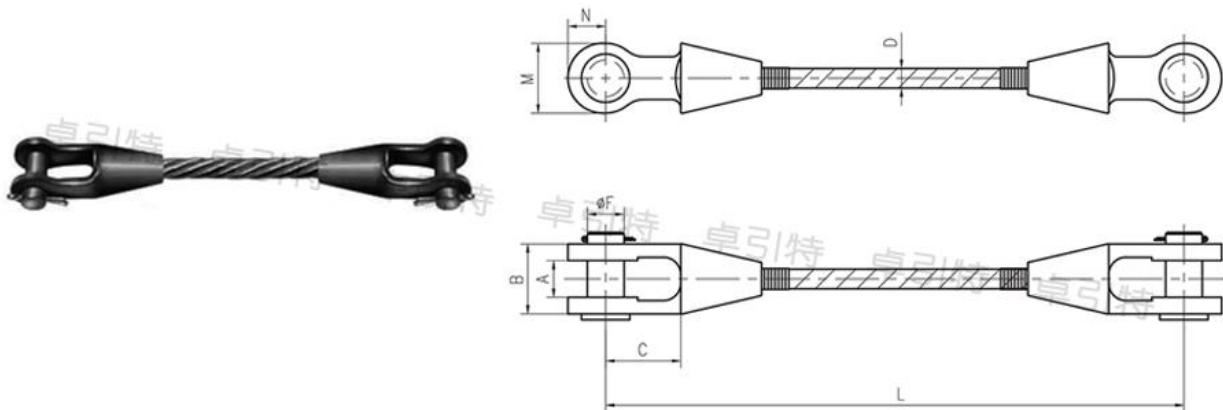

ITEM No.	Joint Model	Diameter(mm)	Size(mm)					
		d	A	B	C	ΦF	M	N
KJ06	1/4	Φ6-Φ7	19	39	40	16.5	33	19
KJ08	5/16-3/8	Φ8-Φ10	21	45	44	20.5	38	22
KJ11	7/16-1/2	Φ11-Φ13	25	53	51	24.5	48	27
KJ14	9/16-5/8	Φ14-Φ16	32	60	64	29.5	57	33.5
KJ18	3/4	Φ18	38	70	76	34.5	67	40
KJ20	7/8	Φ20-Φ22	44	84	89	40.5	80	45
KJ24	1	Φ24-Φ26	51	95	102	50	95	56
KJ28	1 1/8	Φ28	57	107	117	56	105	62
KJ32	1 1/4-1 3/8	Φ32-Φ36	64	124	127	63	122	74
KJ38	1 1/2	Φ38	76	136	152	69	137	80
KJ40	1 5/8	Φ40	76	140	165	75	146	88
KJ44	1 3/4-1 7/8	Φ44-Φ48	89	169	178	88	165	102
KJ52	2 1/8	Φ52-Φ54	102	192	228	94	178	110
KJ56	2 1/4-2 3/8	Φ56-Φ60	114	224	254	106	197	120
KJ64	2 1/2-2 5/8	Φ64-Φ66	127	247	273	119	216	132
KJ70	2 3/4-2 7/8	Φ70-Φ74	133	273	279	125	229	138
KJ76	3-3 1/8	Φ76-Φ80	146	296	286	131	241	150
KJ82	3 1/4-3 3/8	Φ82-Φ86	159	319	298	138	254	165

KJ88	3 1/2-3 5/8	Φ88-Φ92	172	332	318	150	273	175
KJ95	3 3/4-4	Φ95-Φ102	191	371	343	176	318	210
KJ110	4 1/4	Φ110	216	416	390	190	350	235
KJ120	4 7/8	Φ120	267	467	430	200	400	270

### Closed Casting Rigging

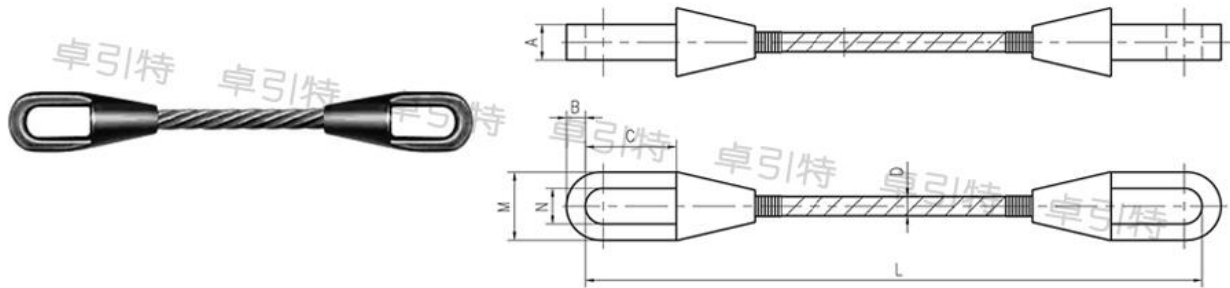

ITEM No.	Joint Model	Diameter(mm)	Size(mm)				
			d	A	B	C	M
BJ06	1/4	Φ6-Φ7	14	14	57	40	22
BJ08	5/16-3/8	Φ8-Φ10	18	16	67	43	25
BJ11	7/16-1/2	Φ11-Φ13	22	18	75	51	30
BJ14	9/16-5/8	Φ14-Φ16	25	21	84	67	36
BJ18	3/4	Φ18	32	27	103	76	42
BJ20	7/8	Φ20-Φ22	38	32	121	92	48
BJ24	1	Φ24-Φ26	45	35	137	105	58
BJ28	1 1/8	Φ28	50	38	152	114	65
BJ32	1 1/4-1 3/8	Φ32-Φ36	55	41	168	127	71
BJ38	1 1/2	Φ38	65	50	202	137	81
BJ40	1 5/8	Φ40	70	54	219	146	83
BJ44	1 3/4-1 7/8	Φ44-Φ48	75	56	248	171	95
BJ52	2-2 1/8	Φ52-Φ54	83	62	279	194	111
BJ56	2 1/4-2 3/8	Φ56-Φ60	92	67	308	216	127
BJ64	2 1/2-2 5/8	Φ64-Φ66	102	79	349	241	140
BJ70	2 3/4-2 7/8	Φ70-Φ74	124	79	365	273	159
BJ76	3-3 1/8	Φ76-Φ80	133	83	381	292	171
BJ82	3 1/4-3 3/8	Φ82-Φ86	146	102	413	311	184
BJ88	3 1/2-3 5/8	Φ88-Φ92	159	102	432	330	197
BJ95	3 3/4-4	Φ95-Φ102	178	108	464	362	216
BJ110	4 1/4	Φ110	200	123	535	404	244
BJ120	4 7/8	Φ120	240	150	595	475	275