


Clevis Clutch

- Forged super alloy steel-Quenched and tempered
- Individually proof test at 2.5 times working load limit.
- Fatiuge tested for 20000 cycles.
- Breakage test
- 100% magnaflux crack detection.
- Suitable for EN818-2 G80 chain.
- Safety factor 4:1
- Surface finish: Powder plastified.



ITEM No.	WLL	Breaking Strength	Size (mm)								Weight kg
	T		T	P± 0.5	C± 0.5	A± 0.3	B±2	H± 1	S± 0.3	L±2	
8-073-06	1.12	4.48	7.5	7.5	8	44	10.3	12	73.5	7.8	0.17
8-073-7/8	2	8	9.5	9.5	10.5	61.7	14	17	101	9.2	0.37
8-073-10	3.15	12.6	13	13	12.4	92	18.4	28	138	13.2	0.97
8-073-13	5.3	21.2	16.5	16.5	16	115	22.7	34.5	177	16.2	2.01
8-073-16	8	32	21	21	19.5	143	28.5	40	220	20	3.32
8-073-20	12.5	50	23.5	23.5	23	152	33.6	46	238	24.3	6.2
8-073-22	15	60	25.5	25.5	26	195	39	57.5	295	28.1	8.5

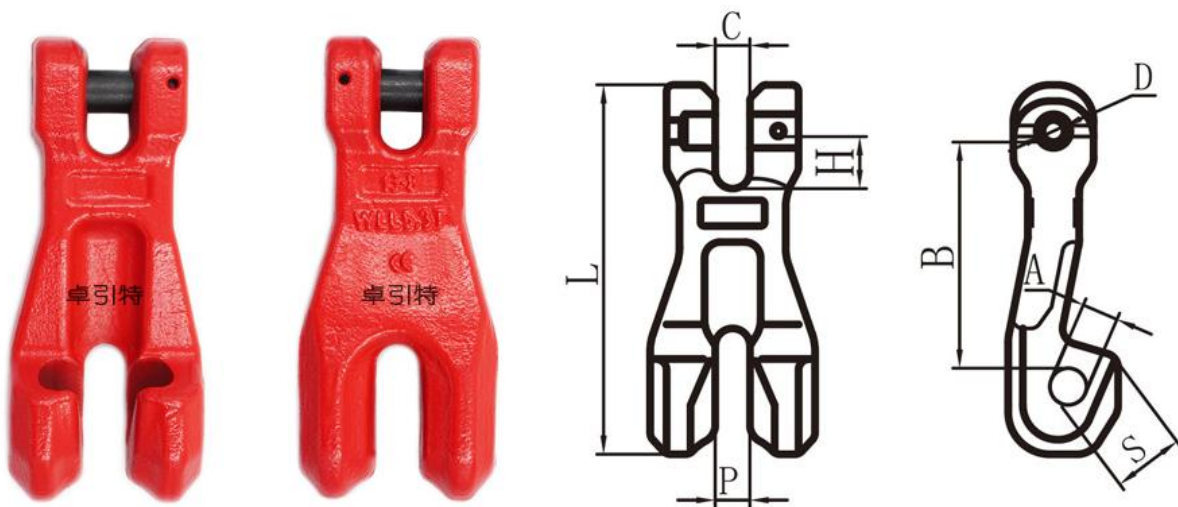