

Single Leg Sling

- Manufactured in accordance with GB/T20652 and EU BS-EN-818-4.
- Classification of chain sling: Single leg sling ,Two leg slings, three leg slings and four leg slings.
- It has the advantages of wear resistance, high temperature resistance, corrosion resistance, low ductility and no elongation after force.
- Customizing the chain parts and length according to the customer's requirements
- Strength grade:G80 and G100.

G80 single leg chain with Clevis sling hook (Standard)

- With clevis sling hook , Practical and affordable.
- Chain length can be customized.



Standard

Length adjustable


ITEM No.		WLL	Diameter	Length	Size(mm)					Master Link	Hook	Chain Weight
Standard	Length adjustable	T	mm	L (m)	A	B	d	E± 2	H± 1	T	T	kg/m
8X-1A-6	8K-1A-6	1.12	6	0.27~10	60	110	13	26	23	1.6	1.12	0.79
8X-1A-8	8K-1A-8	2	8	0.3~10	60	110	16	29	32.5	2.12	2	1.38
8X-1A-10	8K-1A-10	3.15	10	0.37~10	75	135	18	39	35	3.15	3.15	2.2
8X-1A-13	8K-1A-13	5.3	13	0.45~10	90	160	22	47	42.5	5.3	5.3	3.8
8X-1A-16	8K-1A-16	8	16	0.54~10	100	180	26	55	54	8	8	5.63
8X-1A-18	-	10	18	0.6~10	110	200	32	61	58	11.2	12.5	7.3

8X-1A-20	8K-1A-20	12.5	20	0.68~10	140	260	36	61	58	14	12.5	8.6
8X-1A-22	8K-1A-22	15	22	0.79~10	160	300	40	72	62	17	15	10.2
8X-1A-26	-	21.2	26	0.9~10	180	340	45	85	75	21.2	21.2	12.78
8X-1A-32	-	31.5	32	1.06~10	190	350	50	106	88	31.5	31.5	22.29

●Naming rules: if 8X-1A-6, length L=2m, specification model 8X-1A-6*2M

G80 single leg chain with Clevis Selflock Hook

- With clevis selflock hook , Self-locking structure is safer .
- The hook can only be opened by pulling the safety card switch, Automatic closure with load condition.
- Chain length can be customized.

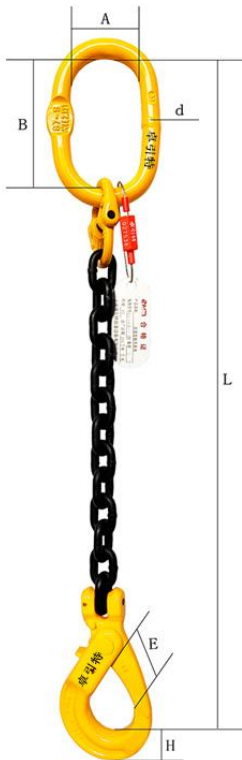

Standard



Length adjustable


ITEM No.		WLL	Diameter	Length	Size(mm)					Master Link	Hook	Chain Weight
Standard	Length adjustable	T	mm	L (m)	A	B	d	E± 1.5	H ± 1	T	T	kg/m
8X-1B-6	8K-1B-6	1.12	6	0.28~10	60	110	13	28	20	1.6	1.12	0.79
8X-1B-8	8K-1B-8	2	8	0.34~10	60	110	16	35.8	24	2.12	2	1.38
8X-1B-10	8K-1B-10	3.15	10	0.41~10	75	135	18	45	28	3.15	3.15	2.2
8X-1B-13	8K-1B-13	5.3	13	0.5~10	90	160	22	52.5	41	5.3	5.3	3.8
8X-1B-16	8K-1B-16	8	16	0.61~10	100	180	26	63.3	50	8	8	5.63

8X-1B-18	-	10	18	0.66~10	110	200	32	76	62	11.2	12.5	7.3
8X-1B-20	8K-1B-20	12.5	20	0.74~10	140	260	36	76	62	14	12.5	8.6
8X-1B-22	8K-1B-22	15	22	0.85~10	160	300	40	86	65	17	15	10.2
8X-1A-26	-	21.2	26	0.98~10	180	340	45	96	74	21.2	21.2	12.78
8X-1A-32	-	31.5	32	1.16~10	190	350	50	135	96	31.5	31.5	22.29

●Naming rules: if 8X-1B-6, length L=2m, specification model 8X-1B-6*2M

G80 single leg chain with Swivel Selflock Hook

- With clevis selflock hook , Self-locking structure is safer .
- The hook can only be opened by pulling the safety card switch, Automatic closure with load condition.
- Chain length can be customized

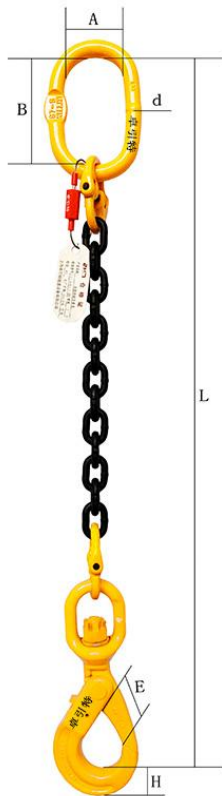

Standard

Length adjustable

ITEM No.		WLL	Diameter	Length	Size(mm)					Master Link	Hook	Chain Weight
Standard	Length adjustable	T	mm	L (m)	A	B	d	E±2	H±1	T	T	kg/m
8X-1C-6	8K-1C-6	1.12	6	0.37~10	60	110	13	29	20	1.6	1.12	0.79
8X-1C-8	8K-1C-8	2	8	0.45~10	60	110	16	34	26	2.12	2	1.38
8X-1C-10	8K-1C-10	3.15	10	0.53~10	75	135	18	44	30	3.15	3.15	2.2
8X-1C-13	8K-1C-13	5.3	13	0.66~10	90	160	22	52	40.5	5.3	5.3	3.8
8X-1C-16	8K-1C-16	8	16	0.8~10	100	180	26	60	50.5	8	8	5.63
8X-1C-18	-	10	18	0.86~10	110	200	32	83	62	11.2	12.5	7.3

8X-1C-20	8K-1C-20	12.5	20	0.95~10	140	260	36	83	62	14	12.5	8.6
8X-1C-22	8K-1C-22	15	22	1.14~10	160	300	40	88	66	17	15	10.2
8X-1C-26	-	21.2	26	1.3~10	180	340	45	95.5	74	21.2	21.2	12.78
8X-1C-32	-	31.5	32	1.58~10	190	350	50	150	96	31.5	31.5	22.29

●Naming rules: if 8X-1C-6, length L=2m, specification model 8X-1C-6*2M

G80 single leg chain with Shortening Clutch Sling Hook

- It can be quickly installed in any position of the lifting chain and has the characteristics of convenience, rapidity and safety.
- Equipped with anti-escaping device.
- Chain length can be customized.




ITEM No.	WLL	Diameter	Length	Size(mm)					Master Link	Chain Weight
	T	mm	L (m)	A	B	d	E±2	H±1	T	kg/m
8X-1D-6	1.12	6	0.5~10	60	110	13	20	22	1.6	0.79
8X-1D-8	2	8	0.5~10	60	110	16	27	27	2.12	1.38
8X-1D-10	3.15	10	0.5~10	75	135	18	33	34	3.15	2.2

●Naming rules: if 8X-1D-6, length L=2m, specification model 8X-1D-6*2M

G100 single leg chain with Clevis sling hook (Standard)

- With clevis sling hook , Practical and affordable.
- Chain length can be customized.
- 25% stronger than G80 chain.

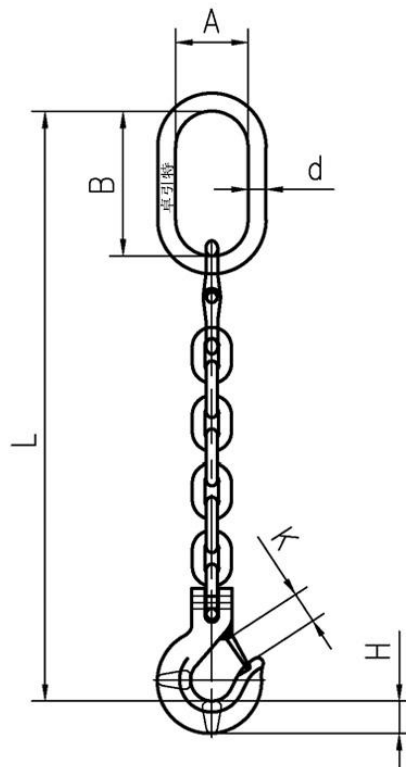







ITEM No.	WLL	Diameter mm	Length L (m)	Size (mm)					Master Link	Hook	Chain Weight kg/m
	T			A	B	d	K±2	H±1	T	T	
10X-1A-6	1.4	6	0.29~10	70	120	14	18.5	21	2.5	1.4	0.79
10X-1A-8	2.5	8	0.34~10	70	120	14	25	27.5	2.5	2.5	1.38
10X-1A-10	4	10	0.4~10	80	140	17	28	33.5	4	4	2.2






- Naming rules: if 10X-1A-6, length L=2m, specification model 10X-1A-6*2M

Chain Combination Form



Load Coefficient

		单腿		双腿				三腿、四腿
卓引特								
起吊角	β	-	-	0°-45°	45°-60°	0°-45°	45°-60°	0°-45°
系数		1	0,8	1,4	1	1,12	0,8	2,1

		三腿、四腿	环捆吊	单环吊		双环吊	
卓引特							
起吊角	β	45°-60°	-	0°-45°	45°-60°	0°-45°	45°-60°
系数		1,5	1,6	1,4	1	2,1	1,5