
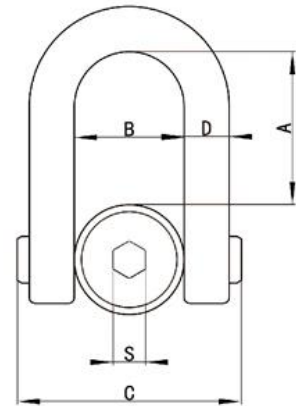


HR swivel hoist rings

- According with EU EN1677 standard .
- Safety factor is 4:1
- Adopt High Strength Alloy Steel.
- Provide customized lengthening screw.

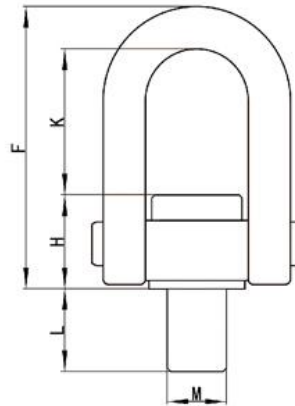

ITEM No.	WLL	Size(mm)										Torque	Weight
	T	L	A	B	C	D	F	K	M	H	S	Nm	kg
HR125-M8×1.25	0.5	12	48.5	37	76	14	103.5	49.5	8	40	8	30	0.8
HR125-M10×1.5	0.7	16	48.5	37	76	14	103.5	49.5	10	40	8	60	0.8
HR125-M12×1.75	1	18	48.5	37	76	14	103.5	49.5	12	40	8	100	0.8
HR125-M14×2.0	1.5	21	48.5	37	76	14	103.5	49.5	14	40	8	120	0.8
HR125-M16×2.0	2	24	48.5	37	76	14	103.5	49.5	16	40	8	150	0.8
HR125-M20×2.5	3	40	73	54	106	20	151	77	20	54	12	250	2
HR125-M24×3.0	4.5	40	73	54	106	20	151	77	24	54	12	400	2.5
HR125-M30×3.5	7.3	45	98.5	74	149	30	206.5	103.5	30	73	17	500	5.5
HR125-M33×3.5	8	50	98.5	74	149	30	206.5	103.5	33	73	17	800	5.5
HR125-M36×4.0	10	54	98.5	74	149	30	206.5	103.5	36	73	17	1000	5.5
HR125-M39×4.0	10	58	98.5	74	149	30	206.5	103.5	39	73	17	1200	6
HR125-M42×4.5	12.5	63	98.5	74	149	30	206.5	103.5	42	73	17	1500	6
HR125-M48×5.0	20	68	117.5	93	183	36	255	122	48	93	19	2000	11.5
HR125-M52×5.0	20	68	117.5	93	183	36	255	122	52	93	19	2000	12
HR125-M56×5.5	25	78	117.5	93	183	36	255	122	56	93	19	2100	12
HR125-M64×6.0	32	90	117.5	93	183	36	255	122	64	93	19	2200	13