


Lifting screw point

- The load of the product is the most unfavorable angle load, the safety factor is 4:1
- Compliance with EU EN1677 Standard.
- Provide product test report certificate.
- The Lifting screw point are not suitable for full load high speed rotation.

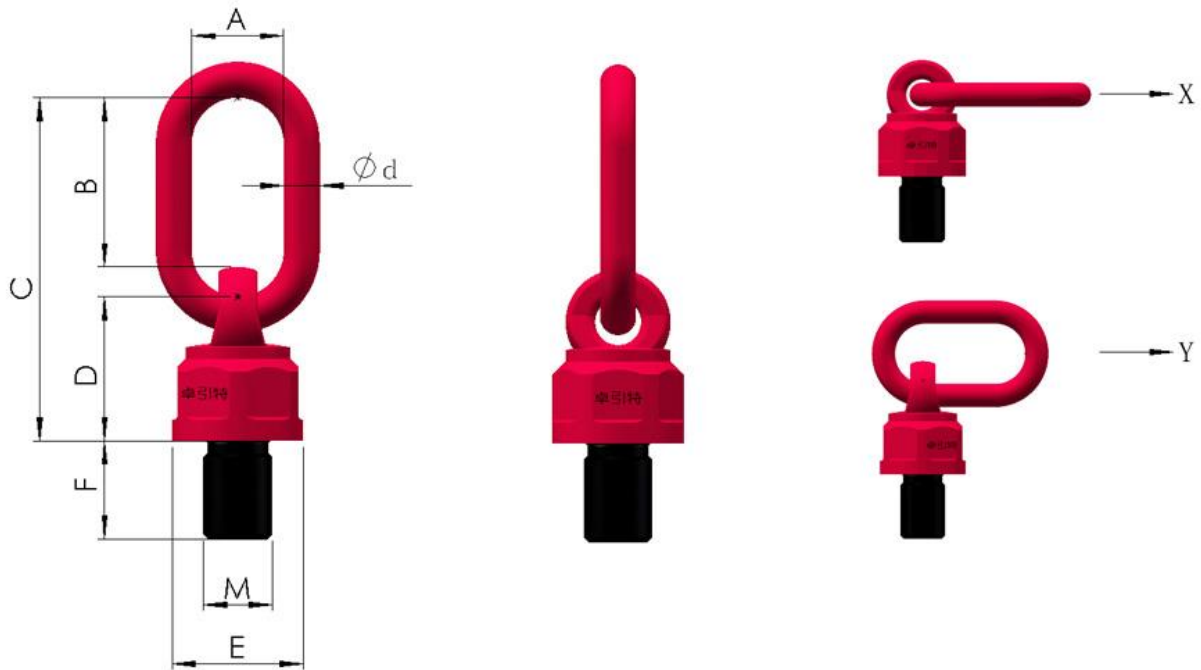

Metric thread

ITEM	WLL(T)		size (mm)							weight (kg)
	endwise	transverse	A	B	C	D	E	d	F	
WBG-M8X1.25-6g	0.4	0.53	27	39	85	38	33.3	7.9	12	0.27
WBG-M10X1.5-6g	0.5	0.65	27	39	85	38	33.3	7.9	19	0.27
WBG-M12X1.75-6g	1.05	1.3	35	58	135	65	54.3	12.7	19.1	1.20
WBG-M14X2.0-6g	1.05	1.3	35	58	135	65	54.3	12.7	31.8	1.20
WBG-M16X2.0-6g	1.9	2.1	35	58	135	65	54.3	12.7	31.8	1.20
WBG-M20X2.5-6g	2.15	2.6	40	67	160	75.5	64.3	19.1	38.1	2.21
WBG-M22X2.5-6g	2.25	2.8	40	67	160	75.5	64.3	19.1	38.1	2.21
WBG-M24X3.0-6g	4.2	4.7	40	67	160	75.5	64.3	19.1	38.1	2.21
WBG-M30X3.5-6g	5	6	50.8	95	205	90	74	22.2	50	3.86
WBG-M33X3.5-6g	7	8.7	50.8	95	205	90	74	22.2	50	3.86
WBG-M36X4.0-6g	8	10	50.8	95	205	90	74	22.2	54	3.86
WBG-M39X4.0-6g	8	10	50.8	95	205	90	74	22.2	58	3.86
WBG-M42X4.5-6g	10	12.5	63	108	230	100	85	25	63	6.08
WBG-M45X4.5-6g	10	12.5	63	108	230	100	85	25	68	6.08
WBG-M48X5.0-6g	10	12.5	63	108	230	100	85	25	68	6.08

WBG-M56X5.5-6g	15	18	70	120	278	132	95	32	84	10.80
WBG-M64X6.0-6g	15	18	70	120	278	132	95	32	95	10.80
WBG-M72X6.0-6g	25	30	80	125	331	166	130	40	108	27.00
WBG-M80X6.0-6g	30	35	80	125	331	166	130	40	120	29.00
WBG-M90X6.0-6g	35	40	80	125	331	166	130	40	135	31.00

Inch thread

ITEM(inch)	WLL(LBS)	size (mm)							weight (kg)
		A	B	C	D	E	d	F	
5/16"-18UNC-2A	800	27	39	85	38	33.3	7.9	12.7	0.27
3/8"-16UNC-2A	1000	27	39	85	38	33.3	7.9	12.7	0.27
7/16"-14UNC-2A	2000	35	58	135	65	54.3	12.7	19.1	1.20
1/2"-13UNC-2A	2500	35	58	135	65	54.3	12.7	19.1	1.20
5/8"-11UNC-2A	4000	35	58	135	65	54.3	12.7	25.4	1.20
3/4"-10UNC-2A	5000	40	67	160	75.5	64.3	19.1	31.8	2.21
1"-8UNC-2A	10000	40	67	160	75.5	64.3	19.1	38.1	2.21
1-1/4"-7UNC-2A	11000	50.8	95	205	90	74	22.2	50.8	3.86
1-1/2"-6UNC-2A	17600	50.8	95	205	90	74	22.2	54	3.86
2"-4.5UNC-2A	22000	65	108	230	100	85	25	76.2	6.08
2-1/2"-4UNC-2A	33000	70	120	278	132	95	32	101.6	10.80

