


Electric Hoist

- Aluminium Body
- Quality chain is supplied by FEC Japan.
- Compact and high efficient motor with heat protection device
- Choose double speed motor, big power and different voltage are available
- Push button is with 24V low voltage to guarantee safety and limit switch system
- Sensitive break system Friction disk without asbestos
- Choose precise process of high tensile helix gear working system to keep lower noise
- Enough Chain bucket set space to suit different lifting length
- IP54 protection on electric hoist for dust and water protection
- Ins class: F

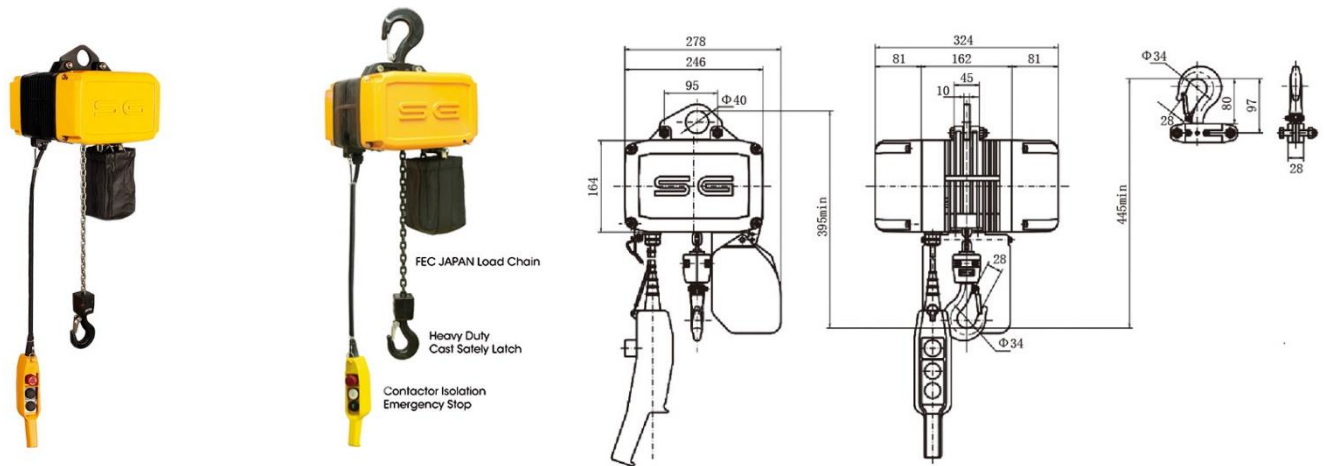

Electric Hoist(Three Phase)

Model	Duty class	Capacity	lifting speed	Lifting height	Power	Weight
		kg	m/min	m	kw	kg
SG200/1H	M3	200	20	3	0.8	25
SG200/1HF	M3	200	20/5	3	0.8/0.2	25
SG320/1S	M3	320	12.5	3	0.8	25
SG320/1SF	M3	320	12.5/3	3	0.8/0.2	25
SG400/2H	M3	400	10	3	0.8	27
SG400/2HF	M3	400	10/2.5	3	0.8/0.2	27
SG500/1N	M3	500	8	3	0.8	25
SG500/1NF	M3	500	8/2	3	0.8/0.2	25
SG630/2S	M3	630	6.3	3	0.8	27
SG630/2SF	M3	630	6.3/1.5	3	0.8/0.2	27
SG1000/2N	M3	1000	4	3	0.8	27
SG1000/2NF	M3	1000	4/1	3	0.8/0.2	27

The lifting height can be customized

Electric Hoist(Single Phase)

Model	Duty class	Capacity	lifting speed	Lifting height	Power	Weight
		kg	m/min	m	kw	kg
SG200/1HD	M3	200	6	3	0.45	25
SG320/1SD	M3	320	6	3	0.45	25
SG400/2HD	M3	400	3	3	0.45	27
SG500/1ND	M3	500	4	3	0.45	25
SG630/2SD	M3	630	3	3	0.45	27
SG1000/2ND	M3	1000	2	3	0.45	27

The lifting height can be customized

Selection Table

Duty class	M3	M4	M5	M6	M7
Stars per hours	150	180	240	300	360
ED%	25%	30%	40%	50%	60%
SG200/1H	200	160	125	100	80
SG200/1HF	200	160	125	100	80
SG320/1S	320	250	200	160	125
SG320/1SF	320	250	200	160	125
SG400/2H	400	320	250	200	160
SG400/2HF	400	320	250	200	160
SG500/1N	500	400	320	250	200
SG500/1NF	500	400	320	250	200
SG630/2S	630	500	400	320	250
SG630/2SF	630	500	400	320	250
SG1000/2N	1000	800	630	500	400
SG1000/2NF	1000	800	630	500	400

